

HD 10C VT

Tandem roller with vibrating roller drum and set of tyres


Tandem rollers Series HD CompactLine / Series H199



HIGHLIGHTS HD CompactLine

- > 3-point swivel joint for optimum driving comfort
- > Clear Side — one-sided drum suspension
- > Low machine height
- > Modern instrument panel
- > Low working platform, high stability
- > Optimum front view due to concaving front end
- > Central suspension point

Machine dimensions		
Total length (L)	mm	2260
Width (B)	mm	1040
Total height (H)	mm	2210
Drum width (X)	mm	1000
Height loading, min. (H1)	mm	1590

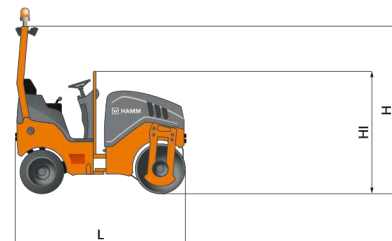

EPA Tier 4

TECHNICAL DATA		Unit	HD 10C VT
	Weights		
	Operating weight with ROPS	kg	1630
	Operating weight, max.	kg	1830
	Static linear load, front	kg/cm	7,9
	Machine dimensions		
	Total length	mm	2260
	Total height with ROPS	mm	2210
	Height loading, min.	mm	1590
	Wheel base	mm	1560
	Total width	mm	1040
	Max. working width	mm	1000
	Turning radius, inside	mm	2130
	Drum dimensions		
	Drum width, front	mm	1000
	Drum diameter, front	mm	620
	Drum thickness, front	mm	12
	Drum type, front		smooth/non-divided
	Wheel dimensions		
	Size of tyres, rear		205/60-R15
	Number of tyres, rear		4
	Diesel engine		
	Manufacturer		KUBOTA
	Version		D1005
	Number of cylinders		3
	Power rat. ISO 14396, kW/PS/rpm		14,8/20,1/2700
	Power rating SAE J1349, kW/HP/rpm		14,8/19,8/2700
	Emissions standard EU/USA		EPA Tier 4
	Exhaust gas after-treatment		-
	Drive		
	Speed, infinitely variable	km/h	0 - 11,0
	Climbing ability, vibration on/off	%	30/40
	Vibration		
	Vibration frequency, front, I/II	Hz	65/52
	Amplitude, front, I/II	mm	0,45/0,45
	Centrifugal force, front, I/II	kN	25/16
	Steering		
	Oscillation angle +/-	°	8
	Steering, type		Articulated steering
	Sprinkler system		
	Water sprinkler, type		Pressure
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	33
	Water tank, capacity	L	70
	Additive tank, capacity	L	9
	Sound level		
	Acoustic power LW(A), sticker		104
	Acoustic power LW(A), measured		104

EQUIPMENT

3-point articulation, Dashboard with displays, indicator lights and switches, Dashboard cover, lockable and weather-resistant, Handrails, Battery isolation switch, Clear Side, Pressure water sprinkling with interval switch, Operator's platform with entry from both sides, Hydrostatic steering, Vibration-isolated operator's platform, Vibration front and rear, switchable single and doubled, Central lifting bracket

OPTIONAL EQUIPMENT

Working lights, Back-up alarm (reversing), Battery isolator switch with cable activation, Driver's seat with seat heating, black imitation leather, comfort equipment, Additional drive lever, left, Anti-freeze injection system, ROPS, foldable, Rotating beacon, Water drain valve, V-belt protection, Plastic scraper, foldable, Automatic engine-off function, WIFMS fleet management interface, Tow eye, at the front, Cup holder

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel. +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

