

HD 10 VT

Tandem roller with vibrating roller drum and set of tyres


Tandem rollers Series HD CompactLine / Series H200







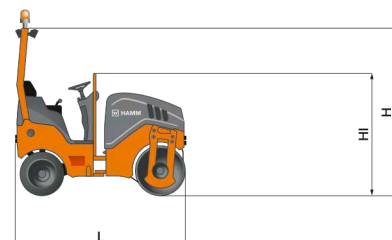

HIGHLIGHTS HD CompactLine

- > Optimum front view due to concaving front end
- > Ergonomic driver platform
- > Modern instrument panel
- > Low machine height
- > 3-point swivel joint for optimum driving comfort
- > Central suspension point
- > Convenient maintenance and service

Machine dimensions		
Total length (L)	mm	2460
Width (B)	mm	1110
Total height (H)	mm	2390
Drum width (X)	mm	1000
Height loading, min. (HI)	mm	1752



EU Stage
IIIA / EPA
Tier 4i

TECHNICAL DATA		Unit	HD 10 VT
	Weights		
	Operating weight with ROPS	kg	2385
	Operating weight, max.	kg	3110
	Static linear load, front	kg/cm	12,1
	Machine dimensions		
	Total length	mm	2460
	Total height with ROPS	mm	2390
	Height loading, min.	mm	1752
	Wheel base	mm	1700
	Total width	mm	1110
	Max. working width	mm	1050
	Ground clearance, left/right	mm	570/570
	Turning radius, inside	mm	2470
	Drum dimensions		
	Drum width, front	mm	1000
	Drum diameter, front	mm	720
	Drum thickness, front	mm	15
	Drum type, front		smooth/non-divided
	Track offset, left/right	mm	0/50
	Wheel dimensions		
	Size of tyres, rear		205/60-R15
	Number of tyres, rear		4
	Diesel engine		
	Manufacturer		KUBOTA
	Version		D1503
	Number of cylinders		3
	Power rat. ISO 14396, kW/PS/rpm		22,9/31,1/2700
	Power rating SAE J1349, kW/HP/rpm		22,9/30,7/2700
	Emissions standard EU/USA		
	Exhaust gas after-treatment		-
	Drive		
	Speed, infinitely variable	km/h	0 - 12,0
	Climbing ability, vibration on/off	%	30/40
	Vibration		
	Vibration frequency, front, I/II	Hz	67/52
	Amplitude, front, I/II	mm	0,54/0,54
	Centrifugal force, front, I/II	kN	46/28
	Steering		
	Oscillation angle +/-	°	8
	Steering, type		Articulated steering
	Sprinkler system		
	Water sprinkler, type		Pressure
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	42
	Water tank, capacity	L	180
	Additive tank, capacity	L	18
	Sound level		
	Acoustic power LW(A), sticker		106
	Acoustic power LW(A), measured		105

EQUIPMENT

3-point articulation, Dashboard with displays, indicator lights and switches, Dashboard cover, lockable and weather-resistant, Handrails, Battery isolation switch, Pressure water sprinkling with interval switch, Operator's platform with entry from both sides, Hydrostatic steering, Vibration-isolated operator's platform, Track offset, Vibration front and rear, switchable single and doubled, Central lifting bracket

OPTIONAL EQUIPMENT

All-wheel lock, Tow hitch, Working lights, Back-up alarm (reversing), Driver's seat with seat heating, black imitation leather, comfort equipment, Anti-freeze injection system, Edge pressing and cutting equipment, ROPS, foldable, Rotating beacon, Plastic tarpaulin, Chip spreader, Water drain valve, V-belt protection, Plastic scraper, foldable, Automatic engine-off function, Drum edge lighting, Tow eye, at the front

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel. +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

