

HD 14 TT

Tandem roller with two sets of tyres

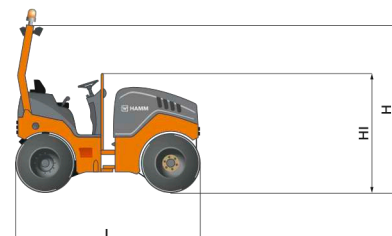
Tandem rollers Series HD CompactLine / Series H208







HIGHLIGHTS HD CompactLine

- > Optimum front view due to concaving front end
- > Ergonomic driver platform
- > Modern instrument panel
- > Low machine height
- > 3-point swivel joint for optimum driving comfort
- > Crab steering
- > Convenient maintenance and service

Machine dimensions		
Total length (L)	mm	2856
Width (B)	mm	1296
Total height (H)	mm	2590
Width over tyres (Y)	mm	1127/1276
Height loading, min. (HI)	mm	1820



TECHNICAL DATA		Unit	HD 14 TT
	Weights		
	Operating weight with ROPS	kg	3470
	Operating weight, max.	kg	4320
	Load per tyre, front/rear	kg	535/466,25
	Machine dimensions		
	Total length	mm	2856
	Total height with ROPS	mm	2590
	Height loading, min.	mm	1820
	Wheel base	mm	1950
	Total width	mm	1296
	Max. working width	mm	1276
	Ground clearance, centre	mm	305
	Turning radius, inside	mm	2602
	Wheel dimensions		
	Size of tyres, front/rear		10.5/80-16
	Width over tyres, front/rear	mm	1127/1276
	Number of tyres, front/rear		3/4
	Diesel engine		
	Manufacturer		KUBOTA
	Version		V2203
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		34,6/47,1/2700
	Power rating SAE J1349, kW/HP/rpm		34,6/46,4/2700
	Emissions standard EU/USA		
	Exhaust gas after-treatment		-
	Drive		
	Speed, infinitely variable	km/h	0-10,0
	Climbing ability	%	40
	Steering		
	Steering, type		Articulated steering
	Sprinkler system		
	Water sprinkler, type		Pressure
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	73
	Water tank, capacity	L	285
	Sound level		
	Acoustic power LW(A), sticker		101
	Acoustic power LW(A), measured		101

EQUIPMENT

3-point articulation, Dashboard with displays, indicator lights and switches, Dashboard cover, lockable and weather-resistant, Handrails, Battery isolation switch, Pressure water sprinkling with interval switch, Operator's platform with entry from both sides, Hydrostatic steering, Vibration-isolated operator's platform

OPTIONAL EQUIPMENT

All-wheel lock, Tow hitch, Working lights, Back-up alarm (reversing), Driver's seat with seat heating, black imitation leather, comfort equipment, Anti-freeze injection system, ROPS, foldable, Rotating beacon, Water drain valve, ROPS cabin with heating, V-belt protection, Automatic engine-off function, Plastic tarpaulin on ROPS

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel. +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

