




CONTRACTOR LINE

MOBISCREEN MS 12 Z

TECHNICAL SPECIFICATIONS

■ TRACK-MOUNTED SCREENING PLANT

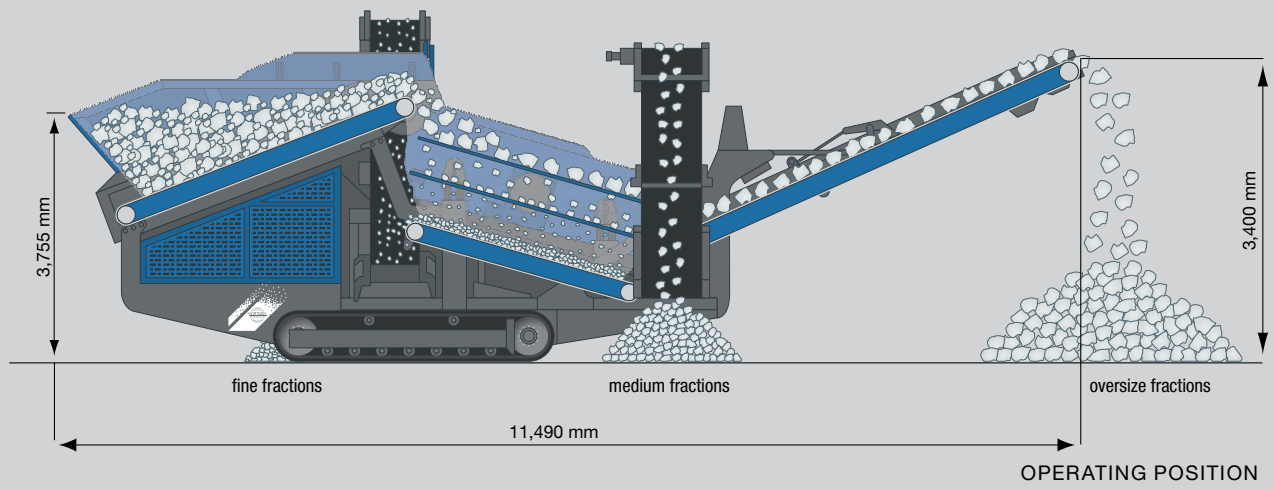

TECHNICAL HIGHLIGHTS

- >> Double-deck screening unit
- >> Diesel-hydraulic drive

- >> Scalping screen
- >> Max. feed size: 300 mm

TECHNICAL SPECIFICATIONS MS 12 Z - AD

Feeding unit		Bottom deck overflow discharge conveyor (medium fractions)	
Feed capacity up to approx. (t/h)	200	Width x length (mm)	650 x 7,000
Feed size max. (mm)	300 x 300	Discharge height approx. (mm)	3,500
Feed height (mm)	3,755	Top deck overflow discharge conveyor (oversize fractions)	
Hopper capacity (with extension) (m ³)	4 (8)	Width x length (mm)	1,050 x 4,600
Belt conveyor feeder		Discharge height approx. (mm)	3,400
Width x length (mm)	1,220 x 3,200	Crawler chassis	
Type (optional)	variable speed	Type	D2
Screening unit		Diesel-hydraulic drive	
Type	double-deck vibration screen	Powerpack CAT (Tier 3, 4i, 4f) (kW)	75
Top deck width x length (mm)	1,220 x 2,750	Transport	
Bottom deck width x length (mm)	1,220 x 2,590	Transport height approx. (mm)	3,200
Belt conveyor underflow material		Transport length approx. (mm)	11,490
Width x length (mm)	1,050 x 2,200	Transport width approx. (mm)	2,500
Bottom deck underflow discharge conveyor (fine fractions)		Transport weight approx. (kg)	15,500
Width x length (mm)	650 x 7,000		
Discharge height approx. (mm)	3,500		