




CONTRACTOR LINE

MOBISCREEN MS 13 Z

TECHNICAL SPECIFICATIONS

■ TRACK-MOUNTED SCREENING PLANT

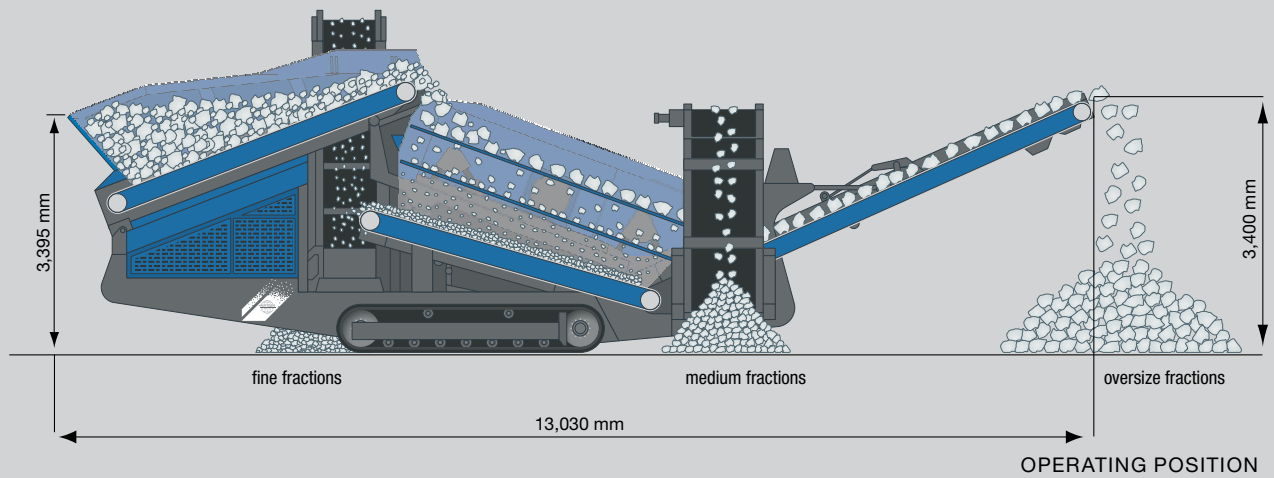

TECHNICAL HIGHLIGHTS

- >> Double-deck screening unit
- >> Diesel-hydraulic drive

- >> Scalping screen
- >> Max. feed size: 400 mm

TECHNICAL SPECIFICATIONS MS 13 Z - AD

Feeding unit		Bottom deck overflow discharge conveyor (medium fractions)	
Feed capacity up to approx. (t/h)	300	Width x length (mm)	800 x 7,600
Feed size max. (mm)	400 x 400	Discharge height approx. (mm)	2,600 - 3,600
Feed height (mm)	3,395 (2,920)	Top deck overflow discharge conveyor (oversize fractions)	
Hopper capacity (m ³)	6	Width x length (mm)	1,200 x 4,600
Belt conveyor feeder		Discharge height approx. (mm)	3,100 - 3,400
Width x length (mm)	1,200 x 3,900	Crawler chassis	
Type (optional)	variable speed	Type	D3
Screening unit		Diesel-hydraulic drive	
Type	double-deck vibration screen	Powerpack CAT (Tier 3, 4i, 4f) (kW)	75
Top deck width x length (mm)	1,370 x 3,660	Transport	
Bottom deck width x length (mm)	1,370 x 3,455	Transport height approx. (mm)	3,200
Belt conveyor underflow material		Transport length approx. (mm)	13,035
Width x length (mm)	1,050 x 3,300	Transport width approx. (mm)	2,500
Bottom deck underflow discharge conveyor (fine fractions)		Transport weight approx. (kg)	23,000
Width x length (mm)	800 x 6,800		
Discharge height approx. (mm)	3,200 - 3,600		