

HD 14 VO

Tandem roller with vibrating roller drum and oscillation drum


Tandem rollers Series HD CompactLine / Series H201









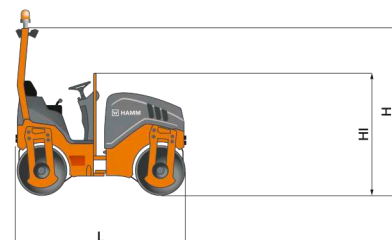




HIGHLIGHTS HD CompactLine

- > 3-point swivel joint for optimum driving comfort
- > Ergonomic driver platform
- > Low machine height
- > Convenient maintenance and service
- > Modern instrument panel
- > Optimum front view due to concaving front end
- > Good visibility — optimum view of drum's outer edges

Machine dimensions		
Total length (L)	mm	2860
Width (B)	mm	1506
Total height (H)	mm	2590
Drum width (X)	mm	1380/1380
Height loading, min. (HI)	mm	1820



TECHNICAL DATA		Unit	HD 14 VO
	Weights		
	Operating weight with ROPS	kg	4435
	Operating weight, max.	kg	5640
	Static linear load, front/rear	kg/cm	15,8/16,5
	Machine dimensions		
	Total length	mm	2860
	Total height with cab	mm	2720
	Total height with ROPS	mm	2590
	Height loading, min.	mm	1820
	Wheel base	mm	1950
	Total width	mm	1506
	Max. working width	mm	1430
	Ground clearance, left/right	mm	720/720
	Turning radius, inside	mm	2650
	Drum dimensions		
	Drum width, front/rear	mm	1380/1380
	Drum diameter, front/rear	mm	900/900
	Drum thickness, front/rear	mm	17/17
	Drum type, front		smooth/non-divided
	Drum type, rear		smooth/non-divided
	Track offset, left/right	mm	0/50
	Diesel engine		
	Manufacturer		KUBOTA
	Version		V2203
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		34,6/47,1/2700
	Power rating SAE J1349, kW/HP/rpm		34,6/46,4/2700
	Emissions standard EU/USA		
	Exhaust gas after-treatment		-
	Drive		
	Speed, infinitely variable	km/h	0 - 11,0
	Climbing ability, vibration on/off	%	30/40
	Vibration		
	Vibration frequency, front, I/II	Hz	60/51
	Amplitude, front, I/II	mm	0,51/0,31
	Centrifugal force, front, I/II	kN	64/39
	Oscillation		
	Oscillation force, rear, I/II	kN	72/43
	Oscillation frequency, rear, I/II	Hz	39/30
	Tangential amplitude, rear, I/II	mm	1,37/1,37
	Steering		
	Oscillation angle +/-	°	8
	Steering, type		Articulated steering
	Sprinkler system		
	Water sprinkler, type		Pressure
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	73
	Water tank, capacity	L	285
	Sound level		
	Acoustic power LW(A), sticker		106
	Acoustic power LW(A), measured		104

EQUIPMENT

3-point articulation, Dashboard with displays, indicator lights and switches, Dashboard cover, lockable and weather-resistant, Handrails, Pressure water sprinkling with interval switch, Operator's platform with entry from both sides, Hydrostatic steering, Vibration-isolated operator's platform, Track offset, Vibration front and rear, switchable single and doubled

OPTIONAL EQUIPMENT

All-wheel lock, Tow hitch, Working lights, Back-up alarm (reversing), Driver's seat with seat heating, black imitation leather, comfort equipment, Anti-freeze injection system, Edge pressing and cutting equipment, ROPS, foldable, Rotating beacon, Protective roof, Chip spreader, Water drain valve, ROPS cabin with heating, V-belt protection, Plastic scraper, foldable, Automatic engine-off function, WIFMS fleet management interface, Drum edge lighting, Tow eye, at the front

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel. +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

